

ashirvad

PIPES

GREASE INTERCEPTOR

REMOVES FOOD WASTE, OIL AND GREASE

WHY ARE ASHIRVAD GREASE INTERCEPTORS THE BEST CHOICE?

- ✓ Injection moulded in engineered thermoplastics
- ✓ **Compact, durable, user-friendly solution**
- ✓ Moulded one piece tank that eliminates seams and potential leaks
- ✓ **Can withstand continuous discharge up to 104°C**
- ✓ Lightweight and strong
- ✓ **Top cover supports 200 kgs of pedestrian and light duty traffic**
- ✓ Connected using mechanical joint couplings allowing for use of various piping materials
- ✓ **Flexibility of installation - can be installed in-floor, on floor or semi-recessed**



canplas[®]
PRODUCT FROM CANADA


Ashirvad - Leadership You Can Trust

Ashirvad has been setting benchmarks for quality since 1975. The leader in the manufacture of PVC and CPVC piping systems, **Ashirvad Pipes is ISO 9001:2008 certified and is a National Award winning company.** With its state-of-the-art factory spread over **40 acres**, the company has an **annual manufacturing capacity of 1,30,000 metric tons** and manufactures a complete range of high technology and superior quality plastic piping systems for domestic and agricultural use. **The manufacturing systems adhere to the highest level of international quality** for a maintenance free life.

Description

Municipalities and building owners spend crores of rupees every year combating grease accumulation in plumbing systems. Grease accumulation causes sewer blockages and overflows. These can be a health risk to you, your employees, and the general public.

Injection moulded in engineered thermoplastics, the Grease Interceptors from Ashirvad provide kitchen and hotel operators the best value and performance in the market today. With no moving parts or heating elements, the Ashirvad grease trap works on hydro mechanical principles and has very high efficiency rates.

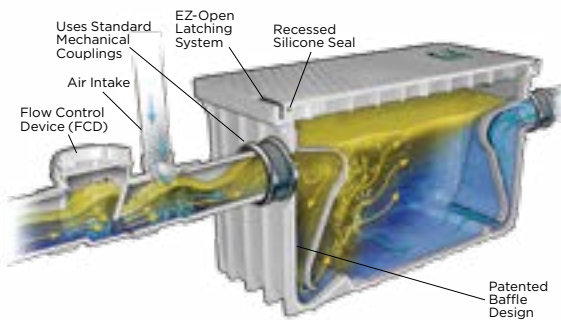


Ashirvad introduces three different grease traps for the Indian market. Product details are given below.

Parameters


Model number	2541001	2541102	2541202
Litres per second (LPS)	0.94	1.6	3.2
Capacity - kilograms	13.6	22.7	45.4
Average efficiency % (ASME 112.4.3)	92.0%	92.5%	93.9%
Grease capacity kg (actual)	18.4	33.6	55.3
Operating temperature capabilities	104°C	104°C	104°C
Surface load capacity	200 kgs	200 kgs	200 kgs
Unit weight (empty)	7.17 kgs	10.4 kgs	27.2 kgs
Liquid capacity	49 L	82 L	197 L
Connection size (mechanical)	2 in	3 in	4 in

www.ashirvad.com

Ashirvad Pipes Pvt. Ltd., 4-B, Attibele Industrial Area, Hosur Road, Bengaluru - 562 107, India. Ph: +91 80 2782 0542 / 543 Fax: +91 80 2782 0463
For more information or customer care write to: info@ashirvad.com or Call +91 99023 33333

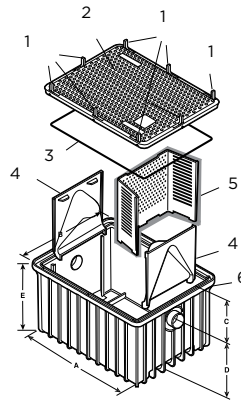

1. Latches
2. Reinforced polypropylene cover
3. Rubber gasket
4. Removable polypropylene baffles
5. Diffuser baffle
6. One-piece tank




Diffuser baffle only used in 3.2 lps models

Tank Dimensions

M.No.	2541001	2541102	2541202
lps	0.94	1.6	3.2
A	14.5 in / 368 mm	23.6 in / 600 mm	31.0 in / 787 mm
B	17.5 in / 444 mm	17.5 in / 444 mm	23.5 in / 597 mm
C	3.5 in / 89 mm	4.1 in / 104 mm	5.0 in / 127 mm
D	12.8 in / 325 mm	12.2 in / 310 mm	18.5 in / 469.9 mm
E	16.3 in / 414 mm	16.3 in / 414 mm	23.5 in / 596.9 mm

Typical in-floor Installation

When installing in-floor, the interceptor must have the cover fitted, as well as be filled with water to the inlet/outlet level. This will ensure the tank itself will not move during backfilling, pouring and/or floor finishing. When backfilling in particular; care should be taken to do so evenly around the unit and with light manual pressure only. Extension sets are available for all models and the flow control device, should you require the unit to be recessed deeper to accommodate existing drainage. Provision of a concrete pit with a load rated access cover will be required where pump trucks of forklifts travel. Ensure that the interceptor is clearly identified to the flooring contractors to prevent it from being covered with flooring material. Taping cardboard to the cover is generally effective.

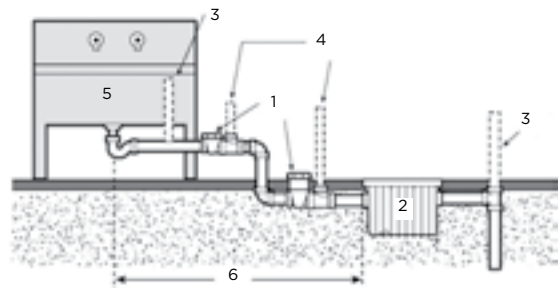

1. Flow control device, 2. Grease Interceptor, 3. Vented waste, 4. Air intake, 5. Sink, 6. Do not exceed 25 ft (7.6m)

The product does not corrode, chip or peel even under the most severe conditions. It is 60% less in weight than directly equivalent competitors in metal, thus offering ease of installation, transportation and storage.

The product comes with a 10 year manufacturer's warranty.



SMART WATER MANAGEMENT PLUMBING . SANITARY . AGRICULTURE

