

ashirvad

PIPES

PAN CONNECTORS

FASTER PLUMBING LEAK-PROOF JOINTS

WHY ARE ASHIRVAD PAN CONNECTORS THE BEST CHOICE ?

- ✓ Moulded in **high grade engineered plastic**
- ✓ Simple pushfit assembly
- ✓ Flexible and self adjusting for slight movement
- ✓ **Leak and odour proof**
- ✓ Cost effective and maintenance free
- ✓ Available in **straight** and **offset** of 18 mm and 40 mm
- ✓ Connects with different materials
- ✓ **Re-usable with aesthetic appeal**
- ✓ Individually packed with lubricant and instruction manual



WARRANTY ON ASHIRVAD PRODUCTS NOT APPLICABLE IN CASE OF USE IN COMBINATION WITH ANY OTHER BRAND AND MAKE OF PIPES AND FITTINGS, SOLVENT AND LUBRICANT.

Pushfit
SWR SYSTEM

TECHNOLOGY FROM

Multikwik UK

Ashirvad - Leadership You Can Trust

Ashirvad has been setting benchmarks for quality since 1975. The leader in the manufacture of PVC and CPVC piping systems, **Ashirvad Pipes is ISO 9001:2008 certified and is a National Award winning company.** With its state-of-the-art factory spread over **40 acres**, the company has an **annual manufacturing capacity of 1,30,000 metric tons** and manufactures a complete range of high technology and superior quality plastic piping systems for domestic and agricultural use. **The manufacturing systems adhere to the highest level of international quality** for a maintenance free life.

Pan Connectors

To connect toilets with horizontal/vertical outlets to standard SWR pipework, Ashirvad has introduced a new range of products that are plumber friendly in nature. Made of flexible plastic, the connectors tolerate movement, are leak proof (with multiple fins) and can connect different pipe materials.

Specifications for Pan Connectors



125 mm x 110 mm

The straight connector (APCS2) is used when the spigot outlet on the commode is in line with the SWR pipework system.



125 mm x 110 mm

The flexible connector (APCC2) is extendable from 225 to 550 mm and is very useful when the SWR pipework is at a significant distance from the spigot outlet or if it is in a vertical position.




125 mm x 110 mm


125 mm x 110 mm

The two ranges of offset connectors (APCO2 and APCO4) are useful if there is a mismatch between the centres of the spigot on the commode side and the SWR pipework. Offsets of up to 40 mm can be catered to by these two pan connectors.

Pan Connector Assembly (Straight/Offset)

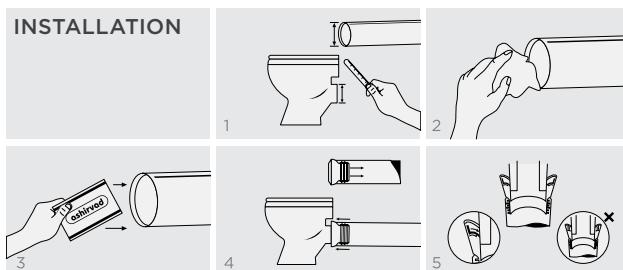

Pan Connector Assembly (Collapsible)

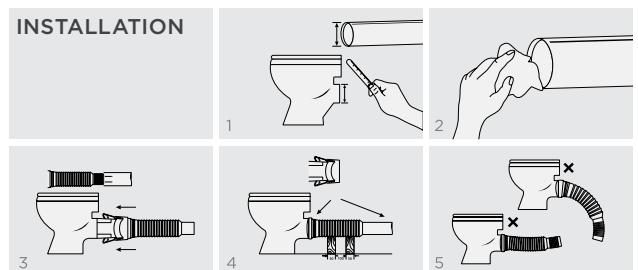

www.ashirvad.com

Ashirvad Pipes Pvt. Ltd., 4-B, Attibele Industrial Area, Hosur Road, Bengaluru - 562 107, India. Ph: +91 80 2782 0542 / 543 Fax: +91 80 2782 0463
For more information or customer care write to: info@ashirvad.com or Call +91 99023 33333



Ver. No.: 02 - 11/15



SMART WATER MANAGEMENT PLUMBING . SANITARY . AGRICULTURE

