

by aliaxis

SINGLE LEVER CONCEALED DIVERTER - HIGH FLOW

Controls the flow of **hot** and **cold** water in **Showers** and **Spouts**.

- The Body of Concealed diverter is made of CPVC.
- ✓ Variants: ¾" High flow
- ✓ 47 mm for high flow single lever cartridge
- Importing ceramic disc cartridge from Kerox, Hungary



Higher Efficiency

& Greater Savings

Benefits:

Cost Saving

Saves 4 MABT cost

Saves Installation Time

Approximately 50% more time saving compared to Brass Fitting

Reduces Installation Failure

Due to reduced number of joints

Easy to Install

Easy to install with plain sockets

Unique Selling Point:


Higher efficiency & greater savings

For High Flow diverter:

Min 0.2 Bar pressure required

Flow Rate v/s Operating Pressure

Water Pressure (Bar)	1.0	1.5	2.0	2.5
Liters per Min (lpm)	26	31	38	44

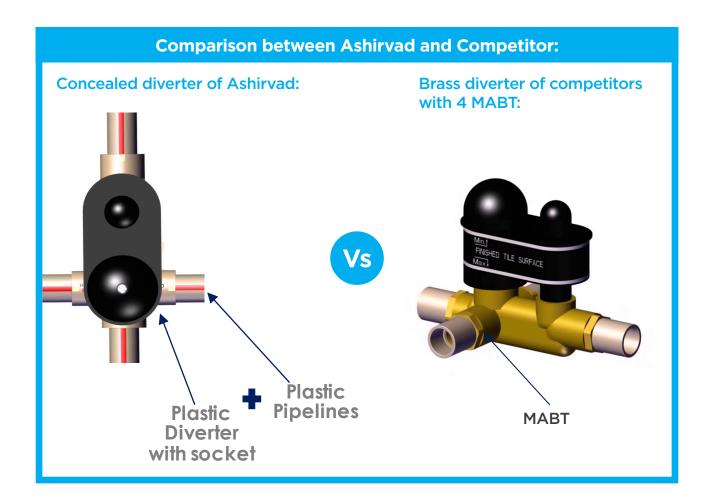

Plates for Shower:







Plates for Shower & Spout:







Ver. No.: 01 - 11/19



Ashirvad Pipes Pvt. Ltd. #4-B, Attibele Industrial Area, Hosur Road, Bengaluru - 562 107, India. Ph: +91 80 2806 1000 / 1700 Fax: +91 80 2806 1080

For any Service / Customer complaint / Queries - Toll Free: 1800 572 8900 | M: +91 9902 333 333 E: customercare@ashirvad.com | www.ashirvad.com

CIN: U85110KA1997PTC021831