(ashirvad)

by aliaxis

SINGLE LEVER CONCEALED DIVERTER - MEDIUM FLOW

Controls the flow of **hot** and **cold** water in **Showers** and **Spouts**.

- The Body of Concealed diverter is made of CPVC.
- ✓ Variants: ¾" Medium flow
- 40 mm for medium flow single lever cartridge
- Importing ceramic disc cartridge from Kerox, Hungary





Benefits:

Cost Saving

Saves 4 MABT cost

Saves Installation Time

Approximately 50% more time saving compared to Brass Fitting

Reduces Installation Failure
Due to reduced number of joints

Easy to Install

Easy to install with plain sockets

Unique Selling Point:


Higher efficiency & greater savings

For Medium Flow diverter:

Min 0.2 Bar pressure required

Flow Rate v/s Operating Pressure

Water Pressure (Bar)	1.0	1.5	2.0	2.5
Liters per Min (lpm)	14	17.5	21.0	23.0

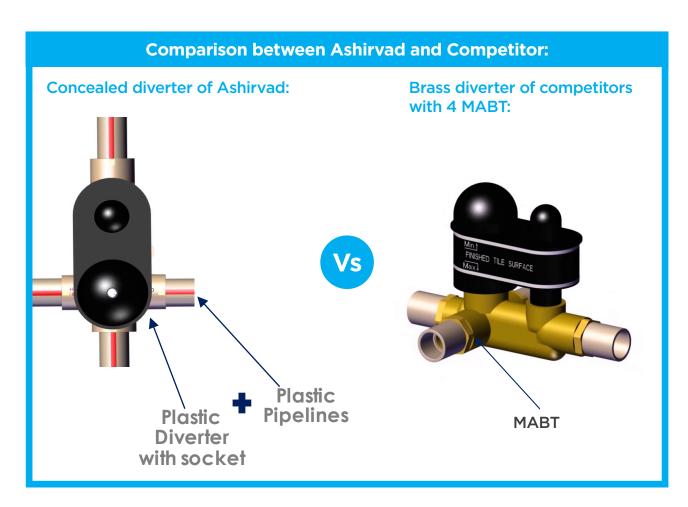

Plates for Shower:







Plates for Shower & Spout:







Ver. No.: 01 - 11/19

